




AVAILABLE MODELS:

# TP1043

+39 011 966 46 16

sales@mect.it  
srlmect@mect.it

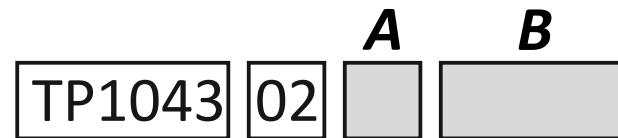

## **A** - Interface

- A** = Isolated RS485, Ethernet port (Rj-45), Micro-USB port
- B** = Isolated CANopen, Ethernet port (Rj-45), Micro-USB port
- AN** = RS485 not isolated, Ethernet port (Rj-45), Micro-USB port

## **B** - Power supply

- 24VDC** = 12÷36Vdc
- 24VAC** = 24Vac ±20% (only for A interface)

All models are available in both **portrait** and **landscape** versions.

All models can use the **sMily remote connection and monitoring service**.